

FL-CT-薄型投光燈專用感應頭 Data Sheet

Features (產品特徵)

- ◆ NO UV or IR light radiation
(沒有紫外線和紅外線輻射光)
- ◆ It Can be installed directly at the 10W~50W
SUOLEDR COB LED Thin type Flood Lighting
(可直接裝於**10W~50W** 索雷特薄型投光燈)
- ◆ Long Lifetime >25000 hours
(壽命>25000小時)
- ◆ Probing range **120°**
(探測範圍 **120°**)
- ◆ Probing Distance **6m(25°C)**
(探測距離 **6m(25°C)**)
- ◆ Waterproof level **IP66**
(防水等級：**IP66**)



Typical Applications(典型應用)

- ◆ Advertising Lighting (廣告牌照明)
- ◆ Flood Lighting (泛光照明)
- ◆ Projector Lighting (投影儀照明)
- ◆ Tunnel lamp (隧道照明)

Product Specifications (產品規格)

Parameter(參數)	Description(描述)
Optical lens(透光罩)	Plastic Cover optical lens(PC 擴光罩)
Housing (散熱主體)	Thermoplastic (導熱塑料)
Operating temperature (工作溫度)	-10°C ~ +40°C
Operating humidity (工作濕度)	≤93%RH
Probing range (探測範圍)	120°
Probing Distance (探測距離)	6m(25°C)
Delay time (延時時間)	5~6min(分) (Adjustable (可調))
Environmental illumination (環境照度)	2~2000LUX
Mounting height (安裝高度)	1.8m~2.5m


FL-CT-薄型投光燈專用感應頭 Data Sheet

Part Number (產品編碼)

Applicable Products (應對產品)	LED Type(LED 類型)	Type (款示)
FL-CT-薄型投光燈專用感應頭	FL-CT-薄型投光燈專用感應頭	FL-CT-薄型投光燈專用感應頭
FL: Flood Lighting (泛光燈)	C: COB LED (COB 光源)	T: Thin Type (薄型款)

Wattage(消耗功率)	Model (產品類型)
FL-CT-薄型投光燈專用感應頭	FL-CT-薄型投光燈專用感應頭
10W~50W	外接式感應頭

Dimensions (產品呎吋圖)

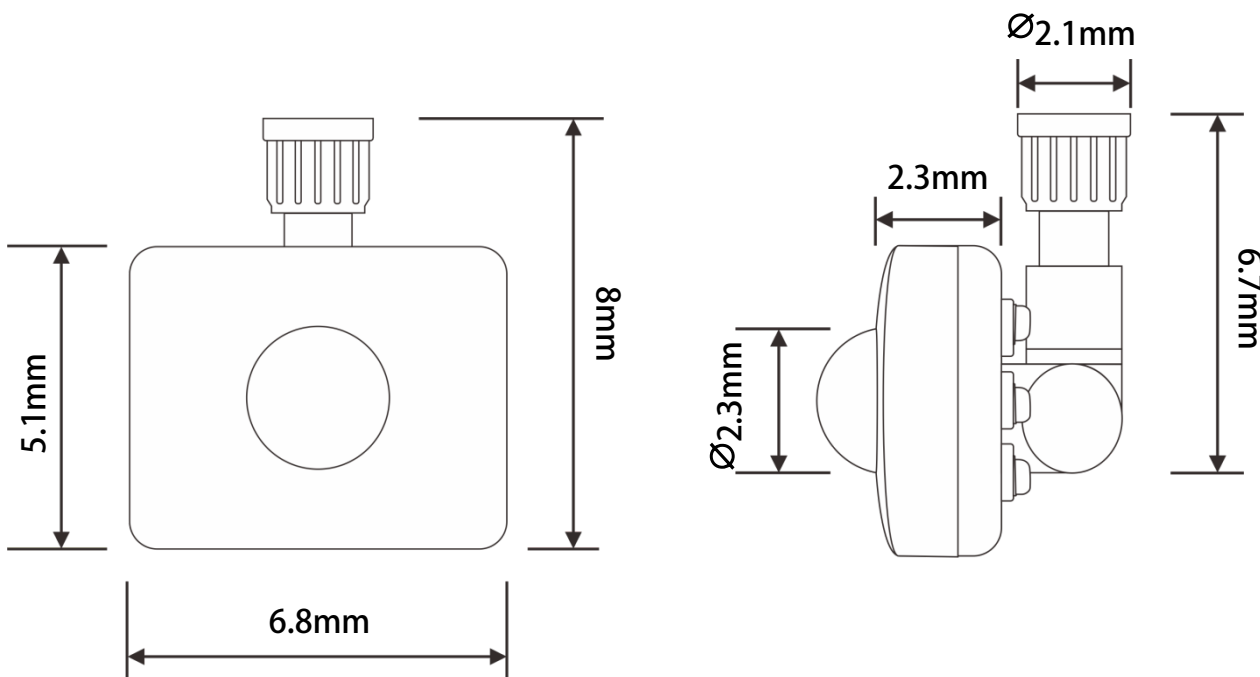


Notes: 1. Dimensions are in millimeters (上圖尺寸資料單位為：MM)

2. Tolerances unless dimensions $\pm 1.5\text{mm}$ (沒注公差的數據公差為： $\pm 1.5\text{mm}$)

FL-CT-薄型投光燈專用感應頭 Data Sheet

Dimensions of Carton (包裝)

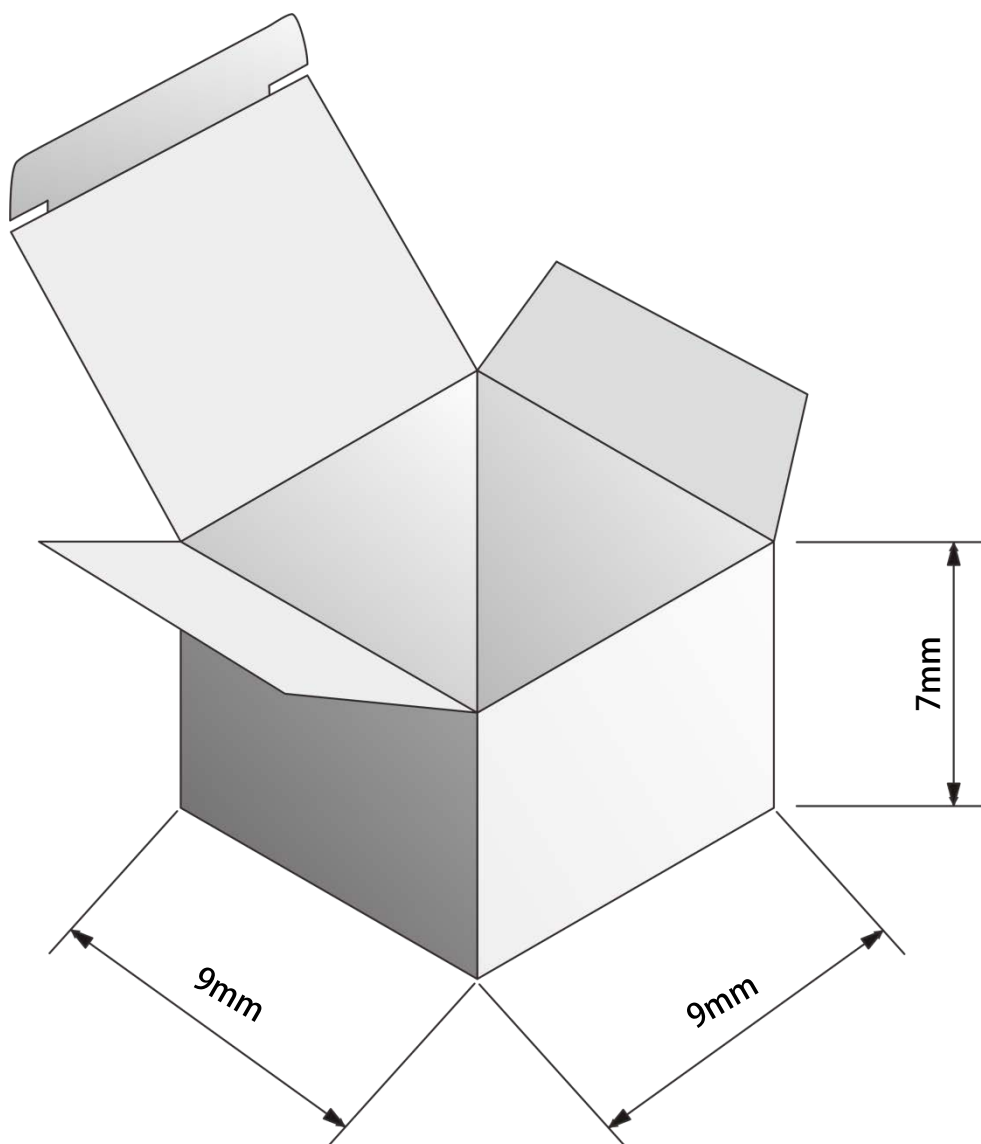

Notes: 1. Dimensions are in millimeters (上圖尺寸資料單位為：MM)

2. Tolerances unless dimensions $\pm 1.5\text{mm}$ (沒注公差的數據公差為： $\pm 1.5\text{mm}$)